
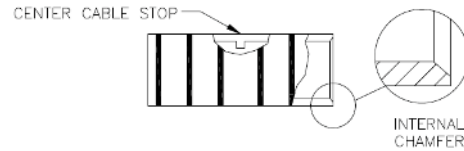



TYPE YS-L

HYLINK™ Splice

UL Listed 90° C, Up to 35 kV ♦

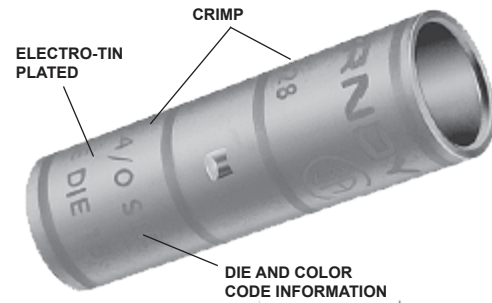

Features & Benefits

- Copper seamless barrel has center stop indentations used to indicate when wire is fully inserted into each side of the barrel
- Barrel is designed with an internal chamfer at the wire entry to ensure smooth insertion of the wire, preventing possible damaging of the wire strands during insertion
- Electro-tin plated unless otherwise specified to reduce galvanic corrosion (bimetallic) and resist corrosive elements
- Short/standard length barrel is recommended for installation with limited space requirements
- Connectors clearly marked with color coding
- BURNDY certifies its products using the BURNDY Engineered System and select other crimp tool manufacturers in accordance with one or more of the UL categories in order to obtain a UL Listing
- Terminals and splices accommodating code wire: Accommodates Code Class B (Concentric, Compressed, Compact) and Class C wire

Catalog Number	Conductor		Dimensions			Dieless (# of crimps)	Installation Tooling ▲						Wire Strip Length	
	Code (B, C)	*** MM ²	Outside Diameter (O.D.)	L	B		Mechanical			35 ■, 750, 46* Series		▲ Die Index		
							Y1MRTC Y2MR	MD734R	MD6 OUR840	Die Number (# crimps)	Color Code			
YS8CLBOX	8 AWG	10	0.27	1.00	0.44	81K Series (1)	Y1MRTC (1)	W8CVT (1)	X8CRT (1)	U8CRT (1)	Red	49	1/2"	
YS6CLBOX	6 AWG	—	0.29	1.75	0.81			W5CVT (1)	X5CRT (1)	U5CRT (1)	Blue	7	7/8"	
YS5CLBOX	5 AWG	16	0.30	1.90	0.81			Y1MRTC (2)	W4CVT (1)	X4CRT (1)	U4CRT (1)	Gray	8	7/8"
YS4CLBOX	4 AWG	—	0.34	1.75	0.81				—	—	U3CRT (1)	White	9	15/16"
YS3CL	3 AWG 2 Sol	25	0.38	2.05	0.88				W2CVT (1)	X2CRT (1)	U2CRT (1)	Brown	10	15/16"
YS2CLBOX	2 AWG	—	0.42	2.00	0.88		W1CVT (1)		X1CRT (1)	U1CRT1 (1)	Green	11	15/16"	
YS1CLBOX	1 AWG	50	0.46	2.06	0.88		W25VT (2)		X25RT (2)	U25RT (1)	Pink	12	15/16"	
YS25LBOX	1/0 AWG	—	0.51	2.08	0.88		81K Series (2)	W26VT (2)	X26RT (2)	U26RT (1)	Black	13	1"	
YS26LBOX	2/0 AWG	70	0.56	2.17	0.94			W27VT (2)	X27RT (2)	U27RT (1)	Orange	14	1-1/16"	
YS27LBOX	3/0 AWG	95	0.62	2.30	1.00			W28VT (2)	X28RT (2)	U28RT (1)	Purple	15	1-1/16"	
YS28LBOX	4/0 AWG	—	0.69	2.32	1.00	W29VT (2)		—	U29RT (1)	Yellow	16	1-1/8"		
YS29LBOX	250 kcmil	120	0.75	2.46	1.06	W30VT (2)		—	U30RT (2)	White	17	1-1/8"		
YS30L	300 kcmil	150	0.81	2.47	1.06	W31VT (2)		—	U31RT (2)	Red	18	1-3/16"		
YS31L	350 kcmil	185	0.88	2.60	1.12	W32VT (2)		—	U32RT (2)	Blue	19	1-1/4"		
YS32L	400 kcmil	—	0.95	2.74	1.19	W34VT (2)		—	U34RT (2)	Brown	20	1-7/16"		
YS34L	500 kcmil	240	1.06	3.15	1.38	81K Series (3)		—	—	U36RT (2)	Green	22	1-7/16"	
YS36L	600 kcmil	300	1.18	3.22	1.38			—	—	U38RT (2)	Pink	400	1-7/16"	
YS38L	700 kcmil	—	1.25	3.22	1.38		—	—	U39RT (2)	Black	24	1-11/16"		
YS39L	750 kcmil	—	1.30	3.72	1.62		—	—	P44RT (3)**	White	27	1-15/16"		
YS44L	1000 kcmil	500	1.49	4.28	1.88		—	—	—	—	—	—	—	

▲ See tooling section of this catalog for complete tool and die listings.

* Use PUADP1 adapter with U dies in 46 Series.

** P44RT for use with 46 Series only. PUADP1 adaptor not required.

*** The MM² conductor sizes listed are the recommendations for Class 2 conductor.

■ The maximum size for the Y35 is 400 kcmil insulated code cable.

♦ For applications greater than 2000 Volts consult cable manufacturer for voltage stress relief instructions.

Note: All dimensions shown are for reference only.

EXPANDED RANGES

The following list of connector types can accommodate a range of conductors when crimped using the 4-POINT® (81K or 4PC) family of tools:



COPPER CONNECTORS

Copper Conductor (Class B&C)**							
Copper Conductor		Standard Barrel			Long Barrel		
Wire Size	Expanded Range	Terminal	Splice	# of Crimps*	Terminal	Splice	# of Crimps*
#8 AWG	#8 AWG	YA8CL-	YS8CL-	1	YA8C-	YS8C-	1
#6 AWG	#6 AWG	YA6CL-	YS6CL-	1	YA6C-	YS6C-	1
#4 AWG	#6 - #4	YA4CL-	YS4CL-	1	YA4C-	YS4C-	1
#2 AWG	#6-#2	YA2CL-	YS2CL-	1	YA2C-	YS2C-	2
#1 AWG	#6-#1	YA1CL-	YS1CL-	1	YA1C-	YS1C-	2
1/0 AWG	#6-1/0	YA25L-	YS25L-	1	YA25-	YS25-	2
2/0 AWG	#4 - 2/0	YA26L-	YS26L-	1	YA26-	YS26-	2
3/0 AWG	#2 - 3/0	YA27L-	YS27L-	2	YA27-	YS27-	2
4/0 AWG	#1 - 4/0	YA28L-	YS28L-	2	YA28-	YS28-	2
250 kcmil	1/0 - 250	YA29L-	YS29L-	2	YA29-	YS29-	2
300 kcmil	2/0 - 300	YA30L-	YS30L-	2	YA30-	YS30-	3
350 kcmil	3/0 - 350	YA31L-	YS31L-	2	YA31-	YS31-	3
400 kcmil	4/0 - 400	YA32L-	YS32L-	2	YA32-	YS32-	3
500 kcmil	4/0 - 500	YA34L-	YS34L-	2	YA34-	YS34-	4
600 kcmil	250 - 600	YA36L-	YS36L-	2	YA36-	YS36-	4
700 kcmil	350-700	YA38L-	YS38L-	3	YA38-	YS38-	4
750 kcmil	500-750	YA39L-	YS39L-	3	YA39-	YS39-	4
800 kcmil	500-800	YA40L-	YS40L-	3	YA40-	YS40-	4
1000 kcmil	750-1000	YA44L-	YS44L-	3	YA44-	YS44-	4

ALUMINUM CONNECTORS

Aluminum & Copper Conductor (Class B & C)**					
Copper / Aluminum Conductor		Connector			
Wire Size	Expanded Range	Terminal	Splice	# Crimps	
#8 AWG	#8 AWG	YA8CA-	YS8CA-	1	
#6 AWG	#6 AWG	YA6CA-	YS6CA-	1	
#4 AWG	#6 - #4 AWG	YA4CA-	YS4CA-	1	
#2 AWG	#6-#2 AWG	YA2CA-	YS2CA-	2	
#1 AWG	#6-#1 AWG	YA1CA-	YS1CA-	2	
1/0 AWG	#6-1/0 AWG	YA25A-	YS25A-	2	
2/0 AWG	#4 - 2/0 AWG	YA26A-	YS26A-	2	
3/0 AWG	#2 - 3/0 AWG	YA27A-	YS27A-	2	
4/0 AWG	#1 - 4/0 AWG	YA28A-	YS28A-	2	
250 kcmil	1/0 - 250	YA29A-	YS29A-	2	
300 kcmil	2/0 - 300	YA30A-	YS30A-	2	
350 kcmil	3/0 - 350	YA31A-	YS31A-	3	
400 kcmil	4/0 - 400	YA32A-	YS32A-	4	
500 kcmil	4/0 - 500	YA34A-	YS34A-	4	
600 kcmil	250 - 600	YA36A-	YS36A-	4	
750 kcmil	500-750	YA39A-	YS39A-	4	



PAT81K2U05A2



PAT4PC834LI

* Same number of recommended crimps for both Standard and Expanded wire ranges

** Class B - Concentric, Compressed, or Compact



The following list of connector types can accommodate a range of conductors when crimped using the 4-POINT® (81K or 4PC) family of tools:



EXPANDED RANGES

COPPER CONNECTORS

Nom Flex Wire Size	Copper Conductor (Flex Only)							
	Standard Barrel				Long Barrel			
	Expanded Range	Terminal	Splice	# of Crimps	Expanded Range	Terminal	Splice	# of Crimps
#8 AWG	#8 AWG	YAV8CL-	YSV8CL-	1	#8 AWG	YAV8C-	YSV8C-	1
#6 AWG	#6 AWG	YAV6CL-	YSV6CL-	1	#6 AWG	YAV6C-	YSV6C-	1
#4 AWG	#6 - #4 AWG	YAV4CL-	YSV4CL-	1	#6 - #4 AWG	YAV4C-	YSV4C-	1
#2 AWG	#6 - #2 AWG	YAV2CL-	YSV2CL-	1	#6 - #2 AWG	YAV2C-	YSV2C-	1
#1 AWG	#4 - #1 AWG	YAV1CL-	YSV1CL-	1	#4 - #1 AWG	YAV1C-	YSV1C-	1
1/0 AWG	#4 - 1/0 AWG	YAV25L-	YSV25L-	1	#4 - 1/0 AWG	YAV25-	YSV25-	2
2/0 AWG	#2 - 2/0 AWG	YAV26L-	YSV26L-	1	#4 - 2/0 AWG	YAV26-	YSV26-	2
3/0 AWG	#1 - 3/0 AWG	YAV27L-	YSV27L-	1	#2 - 3/0 AWG	YAV27-	YSV27-	2
4/0 AWG	1/0 - 4/0 AWG	YAV28L-	YSV28L-	1	#1 - 4/0 AWG	YAV28-	YSV28-	2
250 kcmil	3/0 AWG - 250 kcmil	YAV29L-	YS29L-	1	1/0 AWG - 250 kcmil	YAV29-	YS29-	2
300 kcmil	4/0 AWG - 313.1 kcmil	YA32L-	YS32L-	1	2/0 AWG - 313.1 kcmil	YA32-	YS32-	2
350 kcmil	262.2 - 373.7 kcmil	YA34L-	YS34L-	1	3/0 AWG - 373.7 kcmil	YA34-	YS34-	2
450 kcmil	373.7 - 444.4 kcmil	YA36L-	YS36L-	1	262.2 - 444.4 kcmil	YA36-	YS36-	2
450 kcmil	262.2 - 444.4 kcmil	YA36L-	YS36L-	2				
500 kcmil	444.4 - 535.3 kcmil	YA38L-	YS38L-	1	373.7 - 535.3 kcmil	YA38-	YS38-	2
500 kcmil	373.7 - 535.3 kcmil	YA38L-	YS38L-	2				
600 kcmil	373.7 - 600 kcmil	YA39L-	YS39L-	2	262.2 - 600 kcmil	YA39-	YS39-	3
650 kcmil	444.4 - 646 kcmil	YA40L-	YS40L-	2	444.4 - 646 kcmil	YA40-	YS40-	3
750 kcmil	750.0 - 777.7 kcmil	YA44L-	YS44L-	2	646.0 - 777.7 kcmil	YA44-	YS44-	3



PAT81K2U05A2



PAT4PC834LI